





Pneumatic Conveying

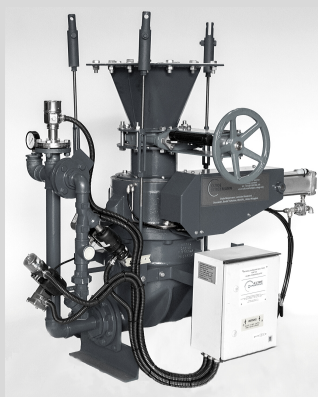

Technical Data Ash Vessel

Pneumatic Bulk Solids Handling
Document No. CPC-TDS-3080

Physical Layout

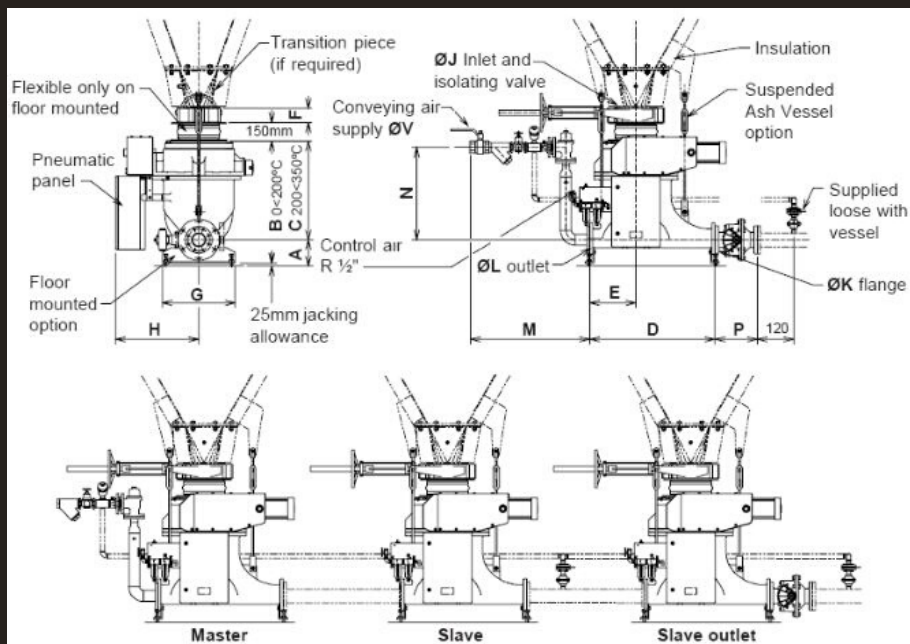


Main Dimensions

Dimensions - (mm) : Apply to PHO - 100°C maximum & PHV - 200°C maximum																	
Model	Ø pipe	A	B	C	D	E	F	G	H	ØJ	ØK	ØL ¹	M ²	N ²	P ³	ØV	KG ⁴
1.5/8	80	150	627	647	786	286	92	400	610	200	80	100	730	644	380	50	320
1.5/8	100	150	627	647	786	286	92	400	610	200	100	100	730	644	350	50	320
1.5/12	80	150	694	706	910	355	117	400	725	300	80	100	730	667	380	50	450
1.5/12	100	150	694	706	910	355	117	400	725	300	100	100	730	667	350	50	450
3.0/8	100	260	729	749	1030	380	92	540	736	200	100	125	891	655	350	50	470
3.0/8	125	270	718	738	1030	380	92	540	736	200	125	125	891	648	450	50	470
3.0/12	100	215	808	820	1030	380	117	540	770	300	100	125	828	757	350	50	650
3.0/12	125	245	808	820	1030	380	117	540	770	300	125	125	828	757	450	50	650
5.0/12	125	245	886	898	1105	455	117	700	745	300	125	150	847	760	450	50	700
5.0/12	150	245	886	898	1105	455	117	700	745	300	150	150	847	760	450	50	700
6.0E/8	125	270	1232	1252	1030	380	92	540	736	200	125	125	1110	1150	450	50	520
8.0/12	150	260	1088	1100	1155	480	117	1070	734	300	150	150	930	947	450	50	800
10.0E/12	125	245	1473	1485	1105	455	117	700	745	300	125	150	847	1347	450	50	750
12.0/12	200	300	1133	1145	1350	540	117	910	810	300	200	200	1375	892	486	80	1000

¹: Ash Vessel outlet diameter. ²: Master vessels only. ³: Slave outlet vessels only. ⁴: Slave vessels only

Typical Installation

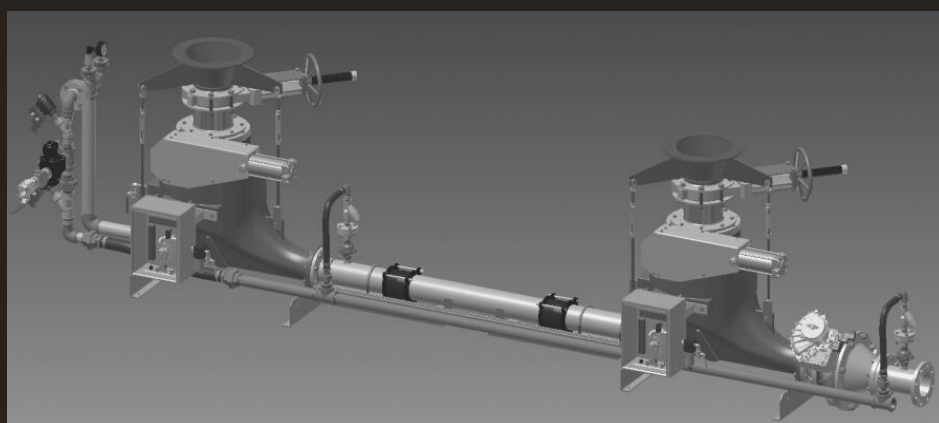

Address

Clyde Pneumatic Conveying Ltd
Lakeside Boulevard
Lakeside
Doncaster
DN5 4PL
United Kingdom

Phone

+44 01302 552200

Email

sales@clydepc.co.uk

Web

www.clydepc.co.uk



ISO9001 | ISO14001



British Engineering